

## Contents

- Dell SuperSpeed USB 3.0 Docking Station
- SuperSpeed USB 3.0 cable
- Driver and Documentation CD
- AC power adapter
- DVI-to-VGA and HDMI-to-DVI Adapters

## Specifications

- Dual video ports (1 x DVI-I, 1 x HDMI)
- 2 x USB 3.0 ports
- 4 x USB 2.0 ports
- Gigabit Ethernet
- Audio In/Out ports
- Security lock slot
- 6.5 A AC adapter
- 2 ft USB 3.0 cable

## Contacting Dell:

1. Visit [www.support.dell.com](http://www.support.dell.com)
2. Select your support category.
3. If you are not a U. S. customer, select your country at the top of the page, or select All to see more choices.
4. Select the appropriate service or support link based on your need.

See [www.dell.com](http://www.dell.com) for additional information on:

- Warranty
- Terms and Conditions (U.S. only)
- End User License Agreement

Additional information on your product is available at [support.dell.com/manuals](http://support.dell.com/manuals)

## Regulatory Compliance

See the safety and regulatory documents that shipped with your Dell product and the regulatory compliance website at [www.dell.com/regulatory\\_compliance](http://www.dell.com/regulatory_compliance) for more information on:

- Safety best practices
- Regulatory certification
- Ergonomics

## System Requirements

Hardware

- CD-ROM drive
- USB 3.0 or 2.0 port
- AC power outlet

Operating System (any of the following)


- Microsoft Windows® 7 (32/64-bit)
- Microsoft Windows® 8 (32/64-bit)



# Super Speed™ USB 3.0 Docking Station



## Docking Station Diagram

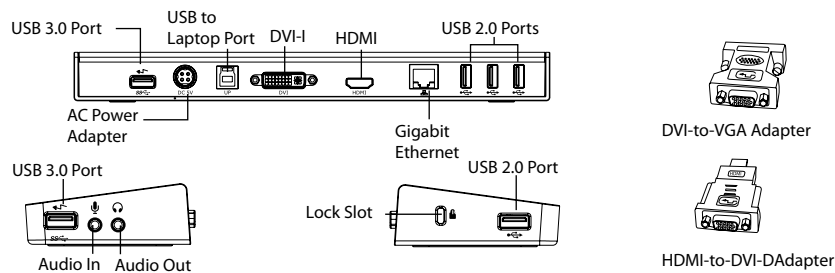

## Setup with Bundled CD

NOTE: DO NOT CONNECT THE DOCKING STATION PRIOR TO INSTALLING THE DISPLAYLINK DRIVER.


- 1) Install the driver from the CD.
- 3) Follow the on-screen instructions until the installation is complete.



- 2) Double click on Setup.exe.  
NOTE: It is recommended to download the latest drivers from the DisplayLink support website at [www.displaylink.com/support](http://www.displaylink.com/support)




- 4) Connect the Docking Station and peripherals.

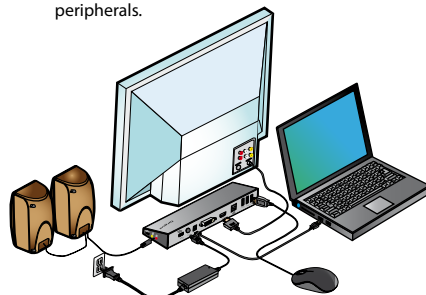

## Setup without Bundled CD

- 1) Connect the Docking Station to your laptop.

NOTE: It is recommended to download the latest drivers from the DisplayLink support website at [www.displaylink.com/support](http://www.displaylink.com/support)

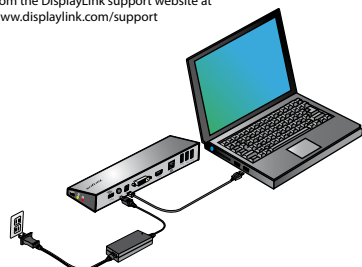


- 2) Windows will start installing the DisplayLink™ Driver automatically.

NOTE: If the driver installation does not automatically start, disconnect the docking station from your laptop, insert the Driver CD, and click on the Setup.exe file.



- 3) Follow the on-screen instructions until the installation is complete.

- 4) Connect all peripheral devices.

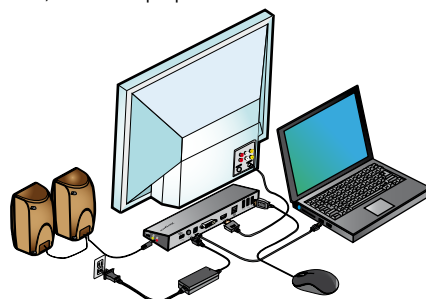

## DisplayLink™ Manager Menu

Menu Option	
DisplayLink Manager	Opens the Screen Resolution window.
Check for Updates	Checks online if new drivers are available to download.
DisplayLink devices	Shows a list of all connected DisplayLink devices.
Audio Setup	Opens the Audio Configuration window.
Video Setup	Opens the Screen Resolution window.
Screen Resolution	Shows a list of all available screen resolutions. Inferred Modes [ ] are not available in mirror mode.
Screen Rotation	Rotates the screen in clockwise or counter-clockwise directions.
Extend	Extends the Windows desktop onto this display.
Set as Main Monitor	Sets this screen as the main display.
Notebook Monitor Off	Switches off the laptop display and uses the DisplayLink display as the main screen (only works on PCs and when only one DisplayLink screen is connected).
Mirror	Shows the same content on both screens (screen resolutions must be the same).
Off	Turns off this DisplayLink display.
Optimize for Video	Select for improved video playback on DisplayLink connected displays (only applicable for video; text may appear less clear).
Fit to TV	Adjusts the size of the Windows desktop to fit the connected TV (only works when one DisplayLink display is connected and set in Extend Mode).

## To Set the Display into Extend Mode

1. Click on the DisplayLink icon.
2. Select Extend in Manager Menu.

The device is now extended in the direction it was the last time the display was in this mode. For more control, use the Extend To submenu and select one of the options. This puts the device into Extend Mode, and places it to the Left/Right/Above/Below the main monitor.

## Fit to TV Configuration

1. To configure Fit to TV, choose the option from the DisplayLink Manager. The following interface appears.



2. You will also see a red border on the DisplayLink screen.



The red border shows the size of the new Windows Desktop. Use the "+" and "-" controls to change the size of the red border until it fits on the TV screen.

3. Once the red border is at the edges of the TV screen, click "Apply" to resize the Windows desktop.

## To Set the Display into Mirror Mode

1. Click on the DisplayLink icon.
2. Select Mirror in Manager Menu.

The resolution, color depth and refresh rate of the primary screen are replicated on the monitor connected to the docking station.